

CV131B

Sun Console Converter



CV131B is a signal converter specifically designed for SUN systems. They can be used with KVM switches. Both models are easy to install and can be configured via the hotkeys on the keyboard.

Features

- Compatible with Sun USB systems
- Compatible with ATEN or ALTUSEN SPHD * or PS/2 equipped KVM switches
- Translates PS/2 keyboard, mouse, and VGA signals to Sun USB keyboard, mouse and monitor signals
- High quality molded connectors
- Keyboard language selection via simple hotkeys
- Composite sync video support
- Supports PS/2 mice and Microsoft Intellimouse
- External power adapter not required
- Supports 1600 x 1200, maximum video resolutions including Sun specific: 1152 x 900


*Compatible with SPHD PS/2 and Combo products only.

Specification

Sun Console Converter

Console Connections	1
Connectors	
To Sun	1 x USB Type A Male (Black) 1 x HDB-15 Male (Blue)
To Switch	1 x 6-pin Mini-DIN Male (Purple) 1 x HDB-15 Female (Blue) 1 x 6-pin Mini-DIN Male (Green)
LEDs	
Power	1 (Orange)
Emulation	
Keyboard / Mouse	Sun
Video	1600 x 1200
Environmental	
Operating Temperature	0-50 °C
Storage Temperature	-20-60 °C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.21 kg (0.46 lb)
Cable Length	1.8 m
Dimensions (L x W x H)	10.65 x 4.20 x 2.07 cm (4.19 x 1.65 x 0.81 in.)
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.

Diagram

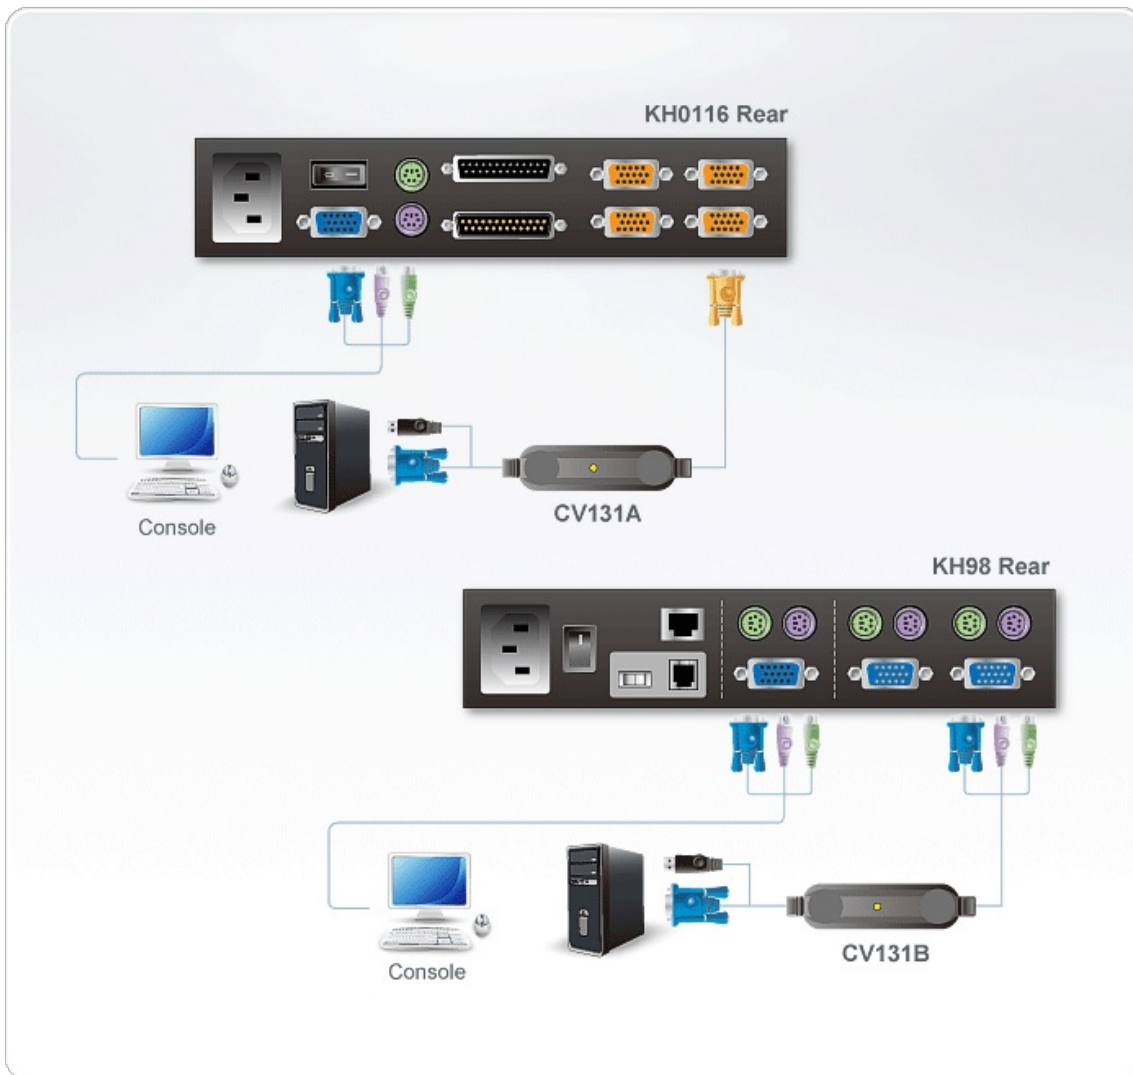

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their
respective owners.