

# **VE892**

HDMI Optical Extender (1080p@20km)



The VE892 is an Optical HDMI Extender that overcomes the length restriction of standard HDMI cables by using optical fiber to send high definition audio and video signals over large distances.

The VE892 accepts an audio-video stream from a local source and serializes the data to pass it over a single 3.125 Gbps optical link (for resolutions up to 1080p@60Hz at 24-bits).

The VE892 can also extend the IR remote control and transfer RS-232 (up to 115kbps) in both directions, allows you to connect serial devices such as touch screens and barcode scanners.









#### **Features**

- Extends the transmission range of HDMI, IR and RS-232 signals using one fiber optic cable
- Very long distance transmission up to 20km
- HDMI (3D, Deep Color), HDCP compatible signaling rates up to 3.125 Gbits
- Superior video quality up to 1080p@60Hz
- Supports full frequency IR signal from 30KHz to 60KHz
   (The IR receiver cable included with the package only supports 30 KHz to 56 KHz)
- Uses one fiber optic cable to connect the local and remote units
- Supports wide screen formats
- Built-in 8KV/15KV ESD protection
- Features RS-232 serial port for connecting peripherals such as touch screens, barcode scanners, etc.
- Supports bi-directional IR signal transmission, one way at a time
- Rack-mountable
- Hot-pluggable

### **Specification**

Function	VE892R	VE892T		
Video Input				
Interfaces	N/A	1 x HDMI Type A Female (Black)		




Impedance	N/A	100 Ω		
Max. Distance	N/A	3 m		
Video Output				
Interfaces	1 x HDMI Type A Female (Black)	N/A		
Impedance	100 Ω	N/A		
Max. Distance	3 m	N/A		
Video				
Max. Data Rate	6.75 Gbps (2.25 Gbps Per Lane)	6.75 Gbps (2.25 Gbps Per Lane)		
Max. Pixel Clock	225 MHz	225 MHz		
Compliance	HDMI (3D, Deep Color) HDCP 1.4 Compatible	HDMI (3D, Deep Color) HDCP 1.4 Compatible		
Max. Distance	1 x SFP Module (*Note) 20km @ Single mode (SM) fiber	1 x SFP Module (*Note) 20km @ Single mode (SM) fiber		
Max. Resolution	Up to 1080p	Up to 1080p		
Audio				
Input	N/A	1 x HDMI Type A Female (Black)		
Output	1 x HDMI Type A Female (Black)	N/A		
Connectors				
Unit To Unit	1 x bi-directional SFP (LC)	1 x bi-directional SFP (LC)		
Power	1 x DC Jack	1 x DC Jack		
Power Consumption	DC5.3V:4.69W:22BTU/h	DC5.3V:5.80W:27BTU/h		
Consumption	Note:  The measurement in Watts indicates the typical power consumption of the device with no external loading.  The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	Note:  The measurement in Watts indicates the typical power consumption of the device with no external loading.  The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.		
Control				
IR Channel	1 x Mini Stereo Jack Female (Black); 30~56 KHz full range transmission	1 x Mini Stereo Jack Female (Black); 30~56 KHz full range transmission		
RS-232 Channel	1 x Terminal Block, 3 pole (Green)	1 x Terminal Block, 3 pole (Green)		
Environmental				
Operating Temperature	0-40°C	0-40°C		
		1		



Storage Temperature	-20 - 60°C	-20 - 60°C
Humidity	0 - 80% RH, Non-Condensing	0 - 80% RH, Non-Condensing
Physical Proper	ties	,
Housing	Metal	Metal
Weight	0.44 kg ( 0.97 lb )	0.44 kg ( 0.97 lb )
Dimensions (L x W x H)	14.17 x 10.30 x 3.00 cm (5.58 x 4.06 x 1.18 in.)	14.17 x 10.30 x 3.00 cm (5.58 x 4.06 x 1.18 in.)
Carton Lot	5 pcs	5 pcs
Note	Operating distance is approximate. A typical maximum distance may vary depending on factors such as fi ber type, bandwidth, connector splicing, losses, modal or chromatic dispersion, environmental factors, and kinks.      It is recommended that you use a Single Mode optical fi ber cable that conforms to IEC 60793- 2-50 B1.1 or ITU-T G.652.B specifi cations.	Operating distance is approximate. A typical maximum distance may vary depending on factors such as fi ber type, bandwidth, connector splicing, losses, modal or chromatic dispersion, environmental factors, and kinks.      It is recommended that you use a Single Mode optical fi ber cable that conforms to IEC 60793- 2-50 B1.1 or ITU-T G.652.B specifi cations.
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	



### Diagram

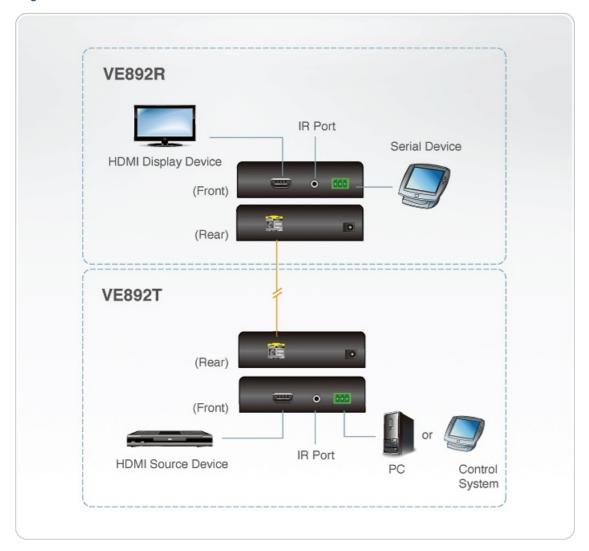

# ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.