

# **VS0202**

2x2 VGA/Audio Matrix Switch



The VS0202 Video Matrix Switch allows video and audio from 2 computers to be routed to 2 monitors, projectors and speakers. Ideal for presentations and applications where information from multiple computers is being delivered to multiple destinations.



#### **Features**

- Each of the 2 video outs can toggle between Source 1 and Source 2 using front panel pushbuttons.
- Audio enabled
- $\bullet\,$  Duplicate and enhance video signals to up to 30 m (max.)  $^{\star}$
- Expandable: Cascade to ATEN's video splitters to support hundreds of video displays
- With up to 200 MHz Video Bandwidth
- OS Support: Windows 2000, Windows XP, Linux, Mac and Sun
  - \* Video content sent over very long distance using a VGA cable might result in slight degradation of the video signal and quality

## Specification


Video Input	
Interfaces	2 x HDB-15 Male (Blue)
Impedance	75 Ω



Max. Distance	1.8 m	
Video Output		
Interfaces	2 x HDB-15 Female (Blue)	
	75 Ω	
Impedance	7512	
Video	I	
Max. Bandwidth	200 MHz	
Max. Resolution	Up to 1920 x 1200	
Max. Distance	Up to 30 m	
Audio		
Input	2 x Mini Stereo Jack Female (Green)	
Output	2 x Mini Stereo Jack Female (Green)	
Connectors		
Power	1 x DC Jack	
Power Consumption	DC5.3V:2.43W:11BTU/h	
	Note:  The measurement in Watts indicates the typical power consumption of the device with no external loading.  The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.	
Environmental		
Operating Temperature	0-50°C	
Storage Temperature	-20 - 60°C	
Humidity	0 - 80% RH, Non-Condensing	
Physical Properties		
Housing	Metal	
Weight	0.47 kg ( 1.04 lb )	
Dimensions (L x W x H)	13.00 x 7.61 x 4.40 cm (5.12 x 3 x 1.73 in.)	
Carton Lot	20 pcs	
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.	



#### Diagram

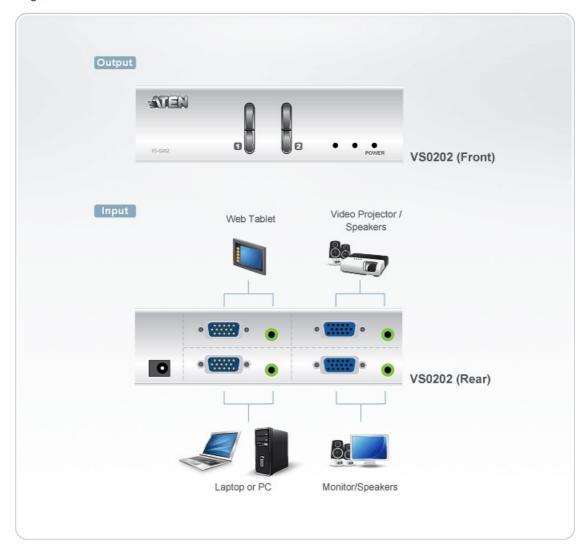

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.