

## CS1642A

2-Port USB DVI Dual Link Dual Display/Audio KVM™ Switch



The CS1642A 2-Port USB DVI Dual View [KVM™](#) Switch is a multi-application device that integrates a 2-port KVM switch with 2-port USB hub. The newest version now supports Quad-View functionality with two Dual View KVM Switches connected.

The new CS1642A features multi-view capabilities, which allow two switches to be daisy chained for a dual, triple, or quadview display across multi-monitor installations. The CS1642A supports advanced nVidia 3D Vision ready 120Hz 3D displaying, allowing you to manage various 3D visual effects. It allows you to manipulate all connected computers from a single console to save resources and work space. It enables each computer to access connected peripherals on a one-computer-at-a-time basis, making it ideal for users who need delicate visual effects and multi-tasking on several computers. The CS1642A is perfect for graphic designers, banking and financial consultants, gamers and medical professionals-demanding a high quality switch that provides stunning color, clarity and functionality.



### Features

- One dual-screen USB console controls two/four dual-screen computers and two additional USB devices
- Multi-View Display – Easily connect two CS1642A/1644A's units for a second dual-screen setup controlled through a single connection
- Superior video quality – 2560 x 1600 at 60Hz (DVI Dual link); and 3D displays up to 1920 x 1200 at 120Hz (DVI Single link)
- Supports widescreen resolutions
- Independent switching of KVM, USB, and Audio focus
- DVI digital and analog monitor support – fully compliant with DVI specifications; and HDCP compliant
- Multiplatform support – Windows 2000/XP/Vista, Linux \*, Mac, Sun, and FreeBSD
- Sun/Mac keyboard support and emulation \*\*
- Video DynaSync, exclusive ATEN technology, to eliminate boot-up display problems and optimizes resolution when switching between ports
- Power on detection - if one computer is powered off, the CS1642A will automatically switch to the next powered-on computer

\* Supports Linux Kernel 2.6 and higher. The CS1642A has a builtin USB 2.0 hub, so will not support PCs or OS that do not support USB 2.0.

\*\* PC keyboard combinations emulate Mac keyboards.

\*\* Mac keyboards only work with their own computers.


### Specifications

Computer Connections	2
Port Selection	Hotkey, Pushbutton, Mouse

Connectors	
Console Ports	2 x USB Type A Female (rear panel) 2 x DVI-I Female (White) 1 x 3.5mm Audio Jack Female (Green) 1 x 3.5mm Audio Jack Female (Pink)
KVM Ports	2 x USB Type B Female 4 x DVI-I Female (white) 2 x 3.5mm Audio Jack Female (Green) 2 x 3.5mm Audio Jack Female (Pink)
Daisy Chain Ports	1 x RJ-45 Female (rear panel)
Power	1 x DC Jack
USB Hub	2 x USB Type A Female (1 x front panel; 1 x rear panel)
LEDs	
KVM	2 (Orange)
Audio	2 (Green)
USB Link	2 (Green)
Switches	
Selected	3 x Pushbutton
Emulation	
Keyboard / Mouse	USB
Video	DVI Dual Link: 2560 x 1600 @ 60Hz; 3D Display: 1920 x 1200 @ 120Hz
Scan Interval	1-99 seconds (default: 5 secs.)
Power Consumption	DC5.3V:3.77W:43BTU/h  Note: <ul style="list-style-type: none"> <li>● The measurement in Watts indicates the typical power consumption of the device with no external loading.</li> <li>● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded.</li> </ul>
Environmental	
Operating Temperature	0–50°C
Storage Temperature	-20–60°C
Humidity	0-80% RH, Non-condensing
Physical Properties	
Housing	Plastic, Metal
Weight	0.56 kg ( 1.23 lb )
Dimensions (L x W x H)	26.23 x 7.68 x 4.40 cm (10.33 x 3.02 x 1.73 in.)

<p>Note</p>	<p>For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.</p>
-------------	--

Diagram

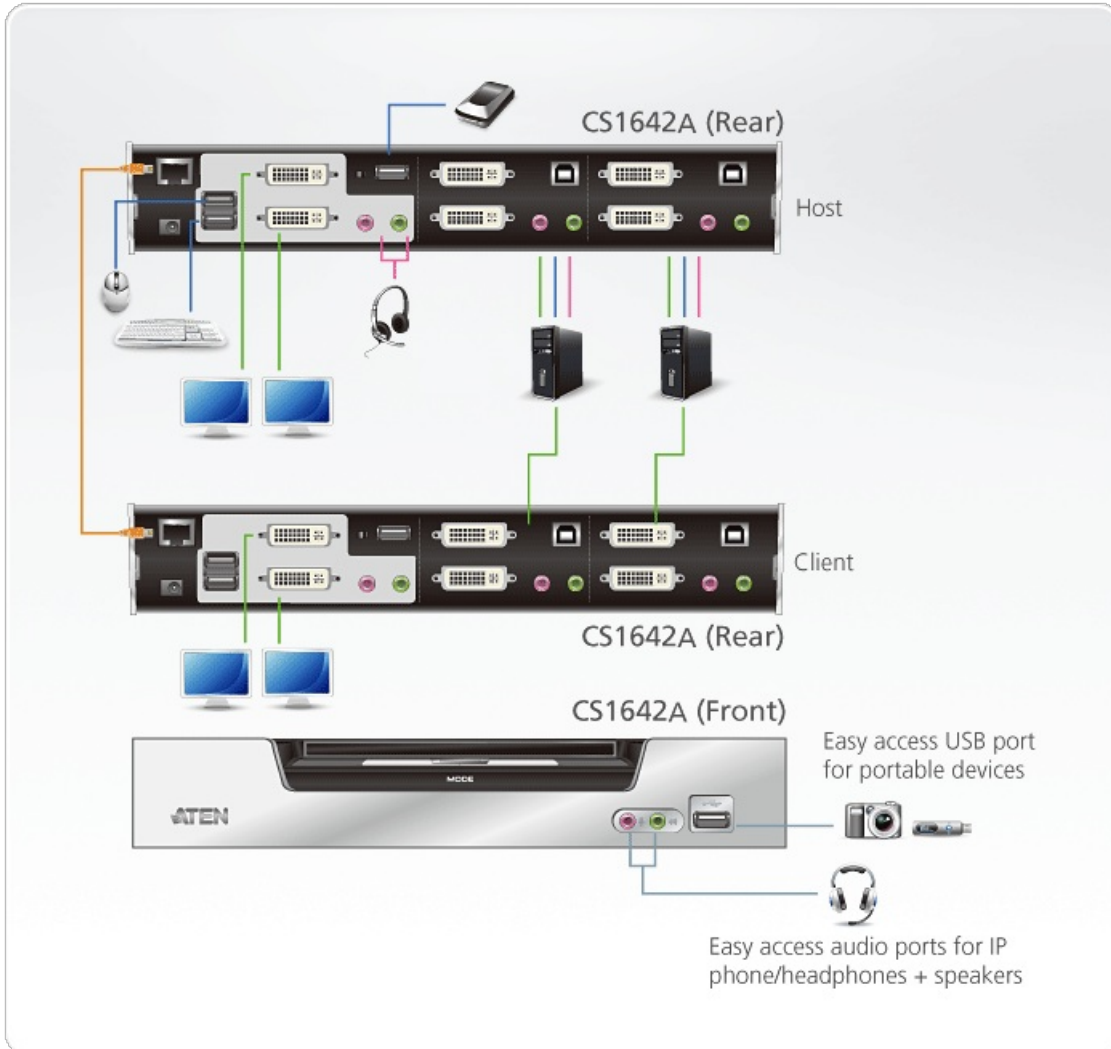

**ATEN International Co., Ltd.**

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.