

KL1100M

17in. Dual Rail LCD Console



The KL1100 is a series of KVM Console modules featuring an integrated 17" LCD panel, a full keyboard, and a touch pad in a 1U rack-mountable sliding housing with AC or DC based input power sources. For added convenience, ports for an external PS/2 or USB keyboard and mouse as well as a monitor are provided on the rear panel - permitting you to manage the switch from a local console.


Features

- Integrated KVM console with 17" LCD monitor in a Dual Rail housing with top and bottom clearance for smooth operation in a 1U high system rack
- Select either AC or DC power input models
- Dual Interface - Supports computers and KVM switches with PS/2 or USB connectors
- Supports an external console with either PS/2 or USB connectors
- Additional hot-pluggable USB mouse port on front panel
- Superior video quality - supports resolutions of up to 1280 x 1024 @75Hz, DDC2B (17" and 19" LCD)
- 105-key keyboard; Sun keyboard emulation
- Dual rail design allows LCD monitor and keyboard/touch pad modules to operate independently
- LCD module rotates up to 120 degrees for a more comfortable viewing angle
- Console lock - enables the console drawer to remain securely locked away in position when not in use
- Compatible with all ATEN KVM switches and most KVM switches in the market
- Adjustable depth to fit within the rack
- DDC emulation - video settings of each computer are automatically adjusted for optimal output to the monitor
- Supports Microsoft Intellimouse (5 keys)
- Supports Logitech and Microsoft wireless mice
- Standard rack mount kit included - optional Easy Rack Mounting (single person installation) rack mount kit available (requires separate purchase)
- Firmware upgradeable
- Super A-Grade TFT LCD Panel; [Zero Dead Pixel Guarantee](#)
- Multiplatform support: Windows 2000/XP/[Vista](#), Linux, Unix, Novell, Sun, FreeBSD
- For more information about KVMs which can connect to KL1100, see [Compatible KVM Table](#)

Rack Mount Kit	Depth in / cm
2X-010G (Long/Optional)	26.8 - 41.3 / 68 - 105
Short (Standard)	16.5 - 30.3 / 42 - 77
Easy Installation Rack Mount Kit	Depth in / cm
2X-012G (Long/Optional)	26.8 - 41.3 / 68 - 105
2X-011G (Short/Optional)	22.4 - 27.6 / 57 - 70

[More information about "Easy Rack Mounting"...](#)

Diagram

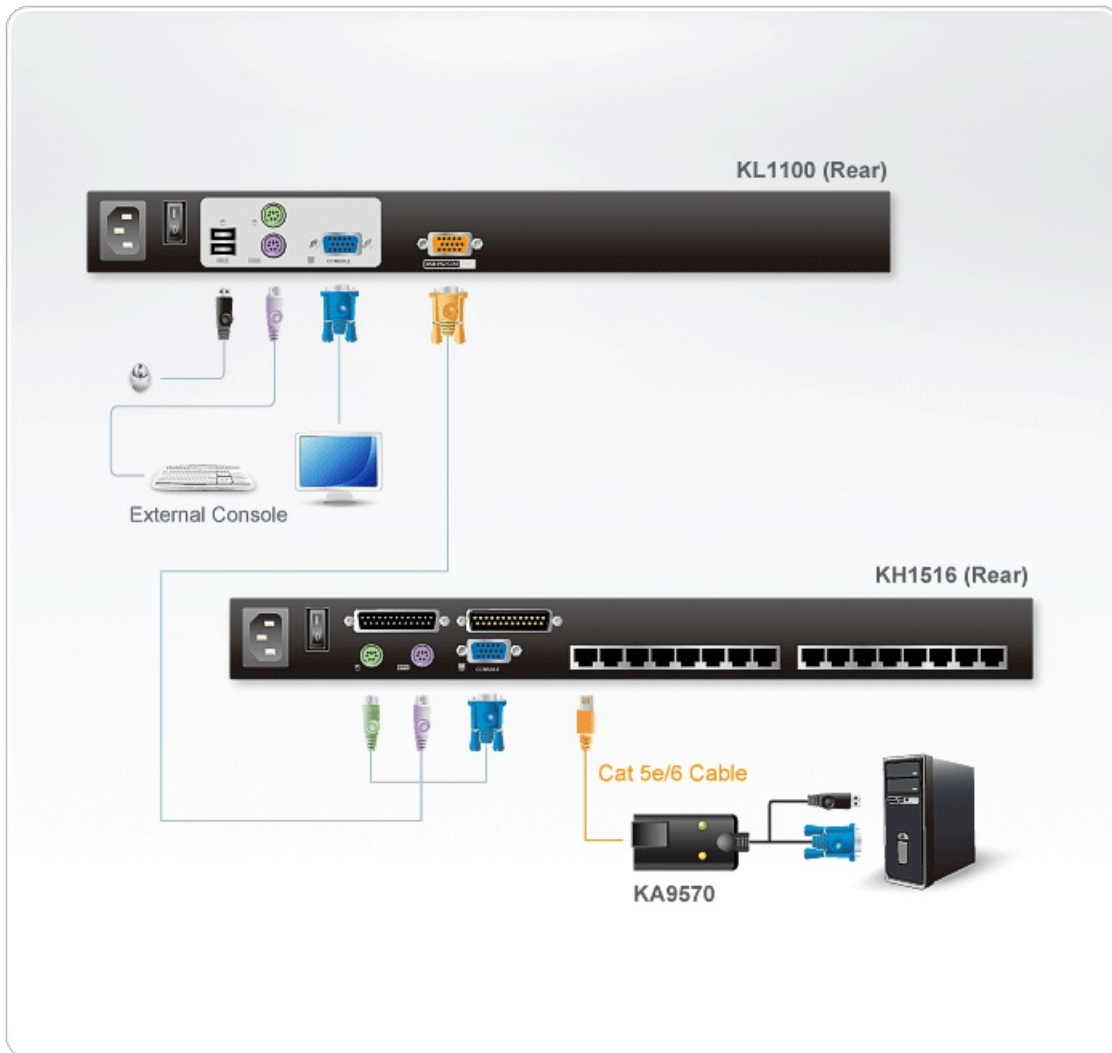

ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their
 respective owners.