

PE5216

20A/16A 16-Outlet Metered eco PDU



As part of its NRGence line, ATEN has developed a new generation of green energy power distribution units (PDUs) to effectively increase the efficiency of data center power usage. The NRGence PE5216 eco PDU is an intelligent PDU that contains 16 AC outlets and is available in various IEC or NEMA socket configurations. It provides the ability to monitor the center's health environment via sensors*.

NRGence eco PDU offers real-time power measurement – allowing you to monitor the power status of devices attached to the PDUs, either at the PDU device or Bank level, from practically any location via a TCP/IP connection. It also offers comprehensive power analysis reports – providing precise measurements of current, voltage, power and watt-hour in a real-time Display.

NRGence eco PDU supports any 3rd party v1, v2 & v3 SNMP Manager Software and ATEN [eco Sensors](#) (eco PDU Manager Software). [eco Sensors](#) provides you with an easy method for managing multiple devices, offering an intuitive and user-friendly Graphical User Interface that allows you to configure a PDU device and monitor power status of the equipment connected to it.

With its advanced security features and ease of operation, the eco PDU is the most convenient, most reliable, and most cost effective way to remotely monitor power status for multiple computer installations and allocate power resources in the most efficient way possible.

* Sensors are optional accessories. A sensor-enabled installation is required to generate a more complete energy-efficient data and chart.

Features

Power Distribution

- Space saving 0U rack mount design with rear mounting
- IEC or NEMA outlet models
- 3 x 7-segment front panel LED shows Current / IP Address for PDU / Bank
- Remote users can monitor PDU/Bank status via web pages on their browsers
- Separate power for the unit's own power and its power outlets – the user interface is still accessible even when an overload condition trips the devices' circuit breaker

Remote Access

- Remote power control via TCP/IP and a built in 10/100 Ethernet port
- Network Protocols: TCP/IP, UDP, HTTP, HTTPS, SSL, SMTP, DHCP, NTP, DNS, auto sense, Ping, Telnet
- eco PDU Power Management software – [eco Sensors](#)
- Supports SNMP Manager V1, V2 & V3

Operation

- Easy setup and operation via a browser-based user interface
- Multibrowser support (IE, Mozilla, Firefox, Chrome, Safari, Opera, Netscape)
- RTC support to keep the timer running during times of no power
- Up to 8 user accounts and 1 administrator account

Management

- Power status measurement at the PDU/Bank level
- LED indicators for current and IP address at the PDU device and/or Bank levels
- Real-time aggregate current, voltage, and power and power dissipation displayed in a browser-based UI for monitoring at the PDU level
- Environment monitoring – supports external temperature / humidity / Differential Pressure sensors for rack environment monitoring
- Current and voltage threshold setting
- Naming support for outlets
- Event logging and syslog support
- Upgradeable firmware
- Multilanguage support: English, Traditional Chinese, Simplified Chinese, Japanese, German, Italian, Spanish, French, Russian

Security

- Two-level password security
- Strong security features include strong password protection and advanced encryption technologies – 128 bit SSL

[eco Sensors Energy Management Software*](#)

- Remote authentication support: RADIUS
- Automatic discovery of all PE devices within the same intranet
- Remote real-time power measurement and monitoring
- Remote real-time environment sensor monitoring
- Plotting/Monitoring of all PE devices
- Exceed threshold alert through SMTP and System log
- Power Analysis Report

*[eco Sensors](#) is designed to work with NRGence™ PDUs, and is bundled with all PE series packages

Model	Inlet	Outlets	Monitoring Level	Amps	
				Per Port	Total
PE5216A	IEC 320 C20	14 x NEMA 5-15R 2 x NEMA 5-20R	PDU	12A/16A	16A (UL), 20A (Max.)
PE5216B	IEC 320 C20	14 x IEC 320 C13 2 x IEC 320 C19	PDU	12A/16A	16A (UL), 20A (Max.)
PE5216G	IEC 320 C20	14 x IEC 320 C13 2 x IEC 320 C19	PDU	10A/15A	I: 16A, O: 15A


Specification

Function	PE5216A	PE5216B	PE5216G
Electrical			
Nominal Input Voltage	100 – 120 VAC	100 – 240 VAC	100 – 240 VAC

Maximum Input Current	20A(Max)	20A(Max)	16A(Max)
Input Frequency	50-60 Hz	50-60 Hz	50-60 Hz
Input Connection	NEMA 5-20P	NEMA 6-20P	IEC 60320 C20
Input Power	2400 VA(Max)	4160 VA(Max)	3680 VA(Max)
Outlet Type	Total: 14 x NEMA 5-15R + 2 x NEMA 5-20R Bank1-1: Outlet 1 – 8; 7 x NEMA 5-15R + 1 x NEMA 5-20R Bank1-2: Outlet 9 – 16; 7 x NEMA 5-15R + 1 x NEMA 5-20R	Total: 14 x IEC320 C13 + 2 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19	Total: 14 x IEC320 C13 + 2 x IEC320 C19 Bank1-1: Outlet 1 – 8; 7 x C13 + 1 x C19 Bank1-2: Outlet 9 – 16; 7 x C13 + 1 x C19
Nominal Output Voltage	100 – 120 VAC	100 – 240 VAC	100 – 240 VAC
Maximum Output Current (Outlet)	NEMA 5-15R: 15A(Max) NEMA 5-20R: 20A(Max)	C13: 15A(Max) C19: 20A(Max)	C13: 15A(Max) C19: 20A(Max)
Maximum Output Current (Bank)	20A(Max)	20A(Max)	16A(Max)
Maximum Output Current (Total)	20A(Max)	20A(Max)	16A(Max)
Breakers	1 x 20A Non-Fuse Breaker	1 x 20A Non-Fuse Breaker	1 x 16A Non-Fuse Breaker
Metering	Bank Level Current, Voltage, VA , PF and kWh Monitoring	Bank Level Current, Voltage, VA , PF and kWh Monitoring	Bank Level Current, Voltage, VA , PF and kWh Monitoring
Outlet Switching	None	None	None
Environment Sensor Ports	2	2	2
Metering Accuracy	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%	Voltage Range: 100VAC ~ 250VAC +/-1% Power Range: 100W ~ Maximum Capacity +/- 2% Current Range: 0.1A~1A +/- 0.1A, 1A~20A +/-1%
Physical Properties			
Dimensions (L x W x H)	132.80 x 6.60 x 4.40 cm (52.28 x 2.6 x 1.73 in.)	132.80 x 6.60 x 4.40 cm (52.28 x 2.6 x 1.73 in.)	132.80 x 6.60 x 4.40 cm (52.28 x 2.6 x 1.73 in.)
Weight	3.47 kg (7.64 lb)	3.47 kg (7.64 lb)	3.47 kg (7.64 lb)
Power Cord Length	3 m	3 m	3 m
Environmental			
Temperature (Operating / Storage)	0–50°C / -20–60°C	0–50°C / -20–60°C	0–40°C / -20–60°C
Humidity (Operating & Storage)	0–80% RH, Non-Condensing	0–80% RH, Non-Condensing	0–80% RH, Non-Condensing

Compliance			
EMC Verification	FCC, Others by Request	FCC, Others by Request	CE, C-Tick, Others by Request
Safety Verification	cTUVus, PSE, Others by Request	cTUVus, PSE, Others by Request	TUV-CB, GOST, Others by Request
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.		

Diagram

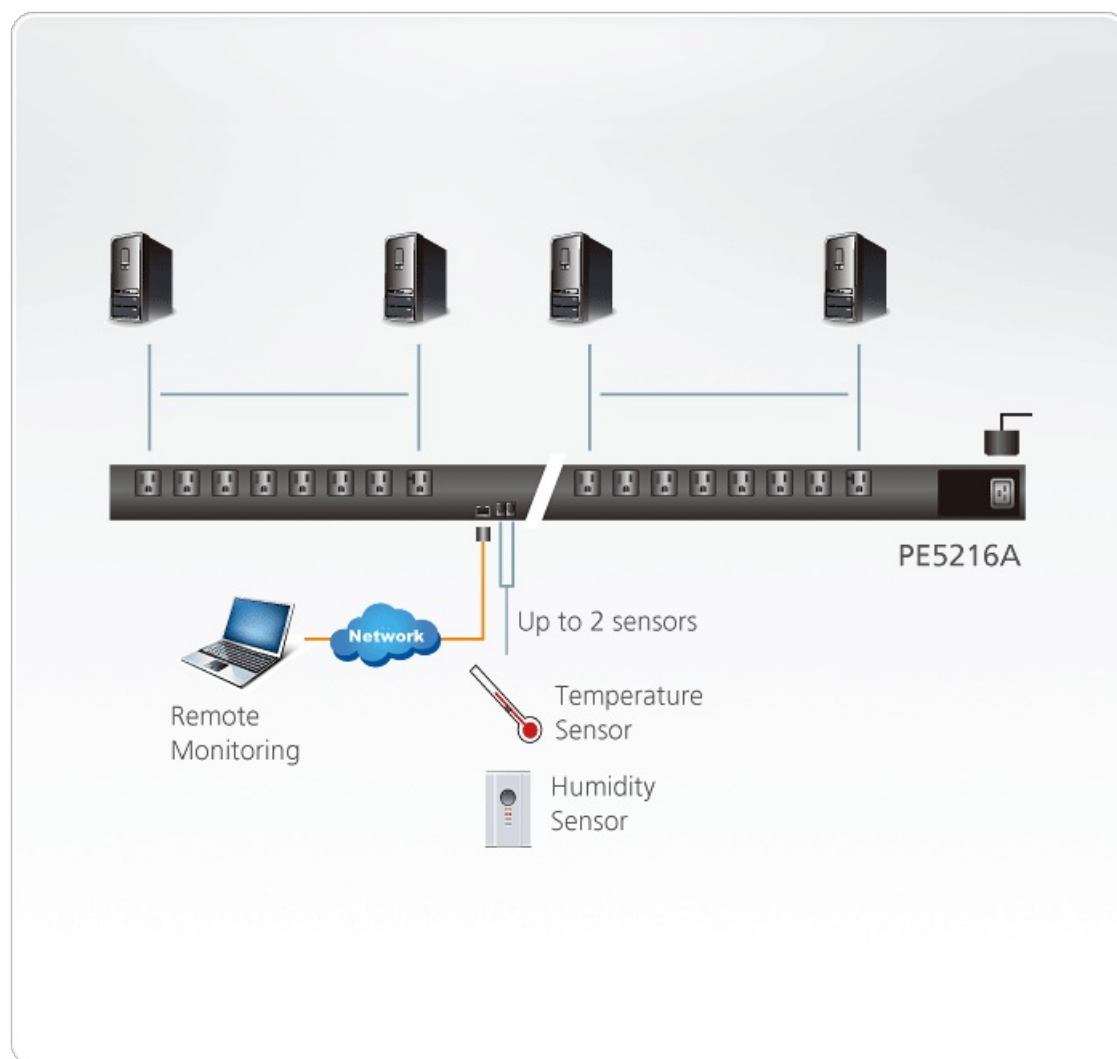

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.