

VE809

HDMI Wireless Extender (1080p@30m)



The VE809 HDMI Wireless Extender extends your HDMI display up to 30 m* from the HDMI source using wireless technology. Easily connect two HDMI devices to an HDTV wirelessly with crystal clear image quality capable of streaming Full 1080p with 5.1 channel digital audio and 3D technology. The IR remote control allows you to switch between HDMI source devices from the receiver side, remotely; and allows you to watch a local and wirelessly connected HDTV- simultaneously. The VE809 consists of a wireless audio/ video transmitter and receiver. Consolidate your HDMI electronics and use the VE809 as a wireless 2-port HDMI switch to connect remote devices such as Blu-ray players and HD Cable boxes to design your own custom wireless entertainment space.

Note: Connecting additional HDMI switches, splitters, or extenders can decrease the audio signal's strength and quality







Features

- Wirelessly extend an HDMI display up to 30 m from the HDMI source*
- Setup two HDTVs and view HD content on two HDTVs simultaneously*
- Uncompressed full HD 1080p video wireless transmission
- · Connect and transmit wireless video content from your Bluray DVD player, HD Cable box or other HDMI device wirelessly
- Wireless 3D Supported
- Wireless HD in Full 1080p
- Supports audio formats digital audio LPCM 7.1 channels, Dolby Digital and DTS Digital 5.1 channels
- Superior video quality 480p, 720p, 1080i and 1080p
- Keep home theater electronic devices neatly out-of-sight
- Built-in IR receiver allows control of source devices from the remote side
- No software or driver installation needed
- HDCP compatible
- Based on WHDI™ Technology Low latency < 1ms
 - * Distance may vary depending on environment; solid objects such as steel, concrete and brick may view shorter distances.

Specifications

Function	VE809R	VE809T		
Video Input				
Interfaces	N/A	2 x HDMI Type A Female (Black)		




Max. Data Beauting N/A 100 Ω Max. Data Beauting 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Impedance 100 Ω 100 Ω Max. Data Bata Bata Bata Bata Bata Bata Bata			
Distance Interfaces 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Impedance 100 Ω 100 Ω 3 m Max. Data Rate 6.75 Gbps (2.25 Gbps Per Lane) 6.75 Gbps (2.25 Gbps Per Lane) Max. Pata Patale 6.75 Gbps (2.25 Gbps Per Lane) 6.75 Gbps (2.25 Gbps Per Lane) Max. Pata Patale 225 MHz 225 MHz Compliance HDMI (3D) HDCP Compatible HDMI (3D) HDCP Compatible Max. Resolutions / Distance Up to 1080p@30m Up to 1080p@30m Audio 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Output 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Coreumption DCSV-8.89W-31BTUh Note:	Impedance	N/A	100 Ω
Interfaces 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black)		N/A	3 m
Max	Video Output		
Nax. Distance 3 m	Interfaces	1 x HDMI Type A Female (Black)	1 x HDMI Type A Female (Black)
Distance Compliance 6.75 Gbps (2.25 Gbps Per Lane) Max. Data Rate 6.75 Gbps (2.25 Gbps Per Lane) 6.75 Gbps (2.25 Gbps Per Lane) Max. Pixel Clock 225 MHz 225 MHz Compliance HDMI (3D) HDCP Compatible HDMI (3D) HDCP Compatible Max. Rixel Resolutions / Distance Up to 1080p@30m Up to 1080p@30m Audio 1nput N/A 2 x HDMI Type A Female (Black) Output 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Power Onsumption DCSV:7.658W:31BTU/h Note:	Impedance	100 Ω	100 Ω
Max. Data Rate 6.75 Gbps (2.25 Gbps Per Lane) 6.75 Gbps (2.25 Gbps Per Lane)		3 m	3 m
Rate Max. Pixel Clock 225 MHz 225 MHz Compliance HDMI (3D) HDCP Compatible HDMI (3D) HDCP Compatible Max. Resolutions / Distance Up to 1080p@30m Up to 1080p@30m Audio Up to 1080p@30m Up to 1080p@30m Input N/A 2 x HDMI Type A Female (Black) Output 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Power Consumption DC5V:6.58W:31BTU/h DC5V:7.84W:37BTU/h Note:	Video		
Clock HDMI (3D) HDCP Compatible HDMI (3D) HDCP Compatible Max. Resolutions / Distance Up to 1080p@30m Up to 1080p@30m Audio Up to 1080p@30m Up to 1080p@30m Input N/A 2 x HDMI Type A Female (Black) Output 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Power Consumption DC5V:6.58W:31BTU/h DC5V:7.84W:37BTU/h Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Note: • The measurement in bTU/h indicates the power consumption of the device when it is fully loaded. Environmental O - 40°C 0 - 40°C Storage Temperature -20 - 60°C -20 - 60°C Humidity 0 - 80% RH, Non-Condensing 0 - 80% RH, Non-Condensing Physical Properties Plastic Plastic Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) 3.50 x 9.50 x 3.15 cm (3.74 x 3.74 x 1.24 in.) 18.20 x 9.65 x 3.15 cm (7.17 x 3.8 x 1.24 in.)		6.75 Gbps (2.25 Gbps Per Lane)	6.75 Gbps (2.25 Gbps Per Lane)
HDCP Compatible HDCP Compatible HDCP Compatible Up to 1080p@30m Up to 1080p@30m Up to 1080p@30m Up to 1080p@30m Audio Input N/A 2 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) DC5V:6.58W:31BTU/h Note: The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature O- 40°C Storage Temperature 1-20 - 60°C -20 - 60°C -20 - 60°C Humidity 0 - 80% RH, Non-Condensing Plastic Plastic Plastic Plastic Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (7.17 x 3.8 x 1.24 in.) Up to 1080p@30m Up to 1080p@30m Up to 1080p@30m Up to 1080p@30m Do 1080p@30m Up to 1080p@30m Do 1080p@30m Do 1080p@30m Do 1080p@30m Do 1080p@30m Dimensions (L x W x H) Up to 1080p@30m Up to 1080p@30m Do 2 x HDM 1 Type A Female (Black) Do 1080p@30m Do 1080p@30m Do 2 x HDMI Type A Female (Black) Do 1080p@30m Do 1080p Do 1080p		225 MHz	225 MHz
Resolutions / Distance	Compliance		
Input N/A 2 x HDMI Type A Female (Black) Output 1 x HDMI Type A Female (Black) Power Consumption DC5V:6.58W:31BTU/h Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature Storage -20 - 60°C Humidity 0 - 80% RH, Non-Condensing 0 - 80% RH, Non-Condensing Physical Properties Housing Plastic Plastic Plastic Plastic 0.20 kg (0.45 lb) DC5V:7.84W:37BTU/h Note: • The measurement in Watts indicates the typical power consumption of the device with no external loading. • The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Physical Properties Housing Plastic Plastic Plastic Plastic Plastic Plastic Plastic O.20 kg (0.45 lb) Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (7.17 x 3.8 x 1.24 in.)	Resolutions /	Up to 1080p@30m	Up to 1080p@30m
Output 1 x HDMI Type A Female (Black) 1 x HDMI Type A Female (Black) Power Consumption Consumption DC5V:6.58W:31BTU/h Note: ● The measurement in Watts indicates the typical power consumption of the device with no external loading. ● The measurement in BTU/h indicates the power consumption of the device when it is fully loaded. Environmental Operating Temperature 0 - 40°C Storage Temperature 1 - 20 - 60°C Humidity 0 - 80% RH, Non-Condensing	Audio		
Power Consumption DC5V:6.58W:31BTU/h DC5V:7.84W:37BTU/h Note:	Input	N/A	2 x HDMI Type A Female (Black)
Consumption Note: The measurement in Watts indicates the typical power consumption of the device with no external loading.	Output	1 x HDMI Type A Female (Black)	1 x HDMI Type A Female (Black)
Note:		DC5V:6.58W:31BTU/h	DC5V:7.84W:37BTU/h
Operating Temperature 0 - 40°C 0 - 40°C Storage Temperature -20 - 60°C -20 - 60°C Humidity 0 - 80% RH, Non-Condensing 0 - 80% RH, Non-Condensing Physical Properties Housing Plastic Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (7.17 x 3.8 x 1.24 in.) (7.17 x 3.8 x 1.24 in.) (7.17 x 3.8 x 1.24 in.)	Consumption	The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power	 The measurement in Watts indicates the typical power consumption of the device with no external loading. The measurement in BTU/h indicates the power
Temperature -20 - 60°C -20 - 60°C Humidity 0 - 80% RH, Non-Condensing 0 - 80% RH, Non-Condensing Physical Properties Plastic Plastic Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm ((3.74 x 3.74 x 1.24 in.) 18.20 x 9.65 x 3.15 cm (7.17 x 3.8 x 1.24 in.)	Environmental		
Temperature Humidity 0 - 80% RH, Non-Condensing Physical Properties Housing Plastic Plastic Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (3.74 x 3.74 x 1.24 in.) 18.20 x 9.65 x 3.15 cm (7.17 x 3.8 x 1.24 in.)		0 - 40°C	0 - 40°C
Physical Properties Housing Plastic Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (3.74 x 3.74 x 1.24 in.) 18.20 x 9.65 x 3.15 cm (7.17 x 3.8 x 1.24 in.)		-20 - 60°C	-20 - 60°C
Housing Plastic Plastic Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) (3.74 x 3.74 x 1.24 in.) 18.20 x 9.65 x 3.15 cm (7.17 x 3.8 x 1.24 in.)	Humidity	0 - 80% RH, Non-Condensing	0 - 80% RH, Non-Condensing
Weight 0.12 kg (0.28 lb) 0.20 kg (0.45 lb) Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (7.17 x 3.8 x 1.24 in.) (7.17 x 3.8 x 1.24 in.)	Physical Propert	ies	
Dimensions (L x W x H) 9.50 x 9.50 x 3.15 cm (3.74 x 3.74 x 1.24 in.) 18.20 x 9.65 x 3.15 cm (7.17 x 3.8 x 1.24 in.)	Housing	Plastic	Plastic
(L x W x H) (3.74 x 3.74 x 1.24 in.) (7.17 x 3.8 x 1.24 in.)	Weight	0.12 kg (0.28 lb)	0.20 kg (0.45 lb)
Carton Lot 5 pcs 5 pcs			
	Carton Lot	5 pcs	5 pcs



Control				
IR	1 x 2.5mm Mini Stereo Jack Female (Black)	1 x 2.5mm Mini Stereo Jack Female (Black)		
Connectors				
Power	1 x DC Jack (Mini USB)	1 x DC Jack		
Note	For some of rack mount products, please note that the standard physical dimensions of WxDxH are expressed using a LxWxH format.			

Diagram

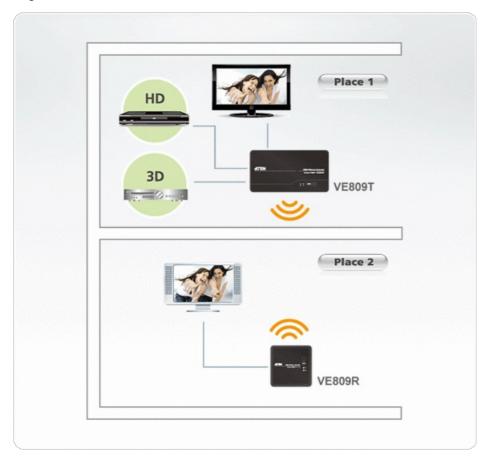

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767

www.aten.com E-mail: marketing@aten.com



© Copyright 2015 ATEN® International Co., Ltd.
ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.